




The Right Connection®

H Series ISO Series 'B' Interchange

¾" & 1" SIZES

Steel is plated using ROHS-compliant trivalent chrome. Stainless steel balls maximize corrosion resistance and steel coupler sleeves are hardened to resist deformation.

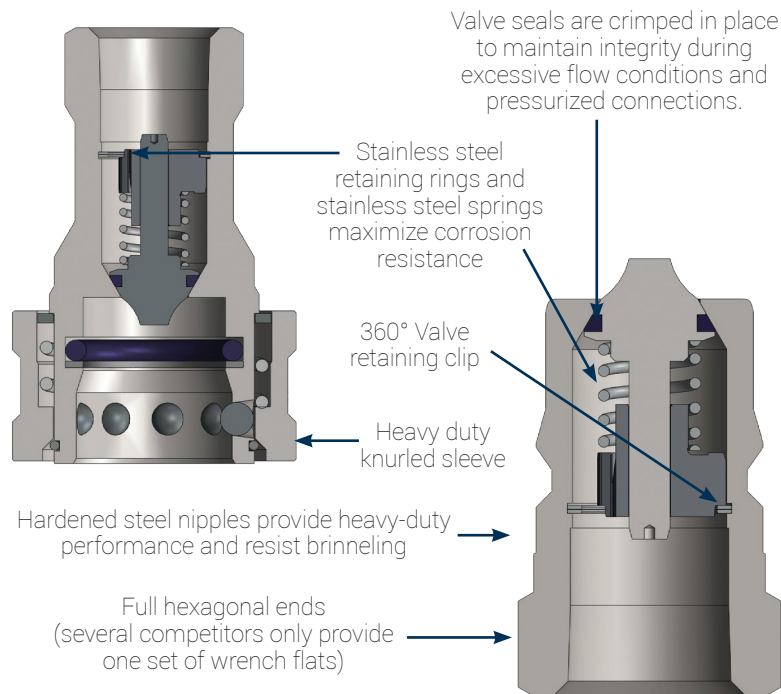

Optional Dust Cap and Dust Plug Features:

- Rigid dust caps & plugs connected with a steel cable lanyard
- Versatile nitrile cap and plug all-in-one combo
- Sold in packaged in quantities of 5 or 25.

Body Size	Dust Cap and Dust Plug Part Number		
	Aluminum Dust Cap	Aluminum Dust Plug	Nitrile Cap & Plug Combo
¾"	H6DC-A	6HDP-A	6HDP-H6DC
1"	H8DC-A	8HDP-A	8HDP-H8DC¹

Dixon Group Canada Limited

2200 Logan Avenue
Winnipeg, MB R2R 0J2
ph: 877.963.4966
email: isales@dixonvalve.ca
canada.dixonvalve.com



The Right Connection®

**H-Series ISO-B Interchange (Connected)
Rated Pressure Chart**

Body Size	Steel Coupler/Plug				Brass Coupler/Plug				303 Stainless Coupler/Plug				316 Stainless Coupler/Plug			
	Max. Working		Burst		Max. Working		Burst		Max. Working		Burst		Max. Working		Burst	
	PSI	Bar	PSI	Bar	PSI	Bar	PSI	Bar	PSI	Bar	PSI	Bar	PSI	Bar	PSI	Bar
¾"	4,000	275	16,500	1,150	2,000	138	12,000	800	3,000	200	16,000	1,100	3,000	200	21,500	1,450
1"	4,000	275	16,000	1,100	1,500	100	8,500	600	2,000	138	15,000	1,000	2,000	138	15,000	1,000

H-Series ISO-B Interchange Coupler (Female Threads)

Body Size	Part Detail			Length		Maximum OD		Hex Inch	Package Qty	
	Part Number	Threads	Material	Inch	mm	Inch	mm		Bag	Box
¾"	6HF6	¾" - 14 NPTF	steel	3.55	90.2	2.22	56.4	1-5/16"	-	10
	6HF6-B	¾" - 14 NPTF	brass	3.55	90.2	2.22	56.4	1-5/16"	-	10
	6HF6-S	¾" - 14 NPTF	303 stainless	3.55	90.2	2.22	56.4	1-5/16"	-	10
	6HF6-SS	¾" - 14 NPTF	316 stainless	3.55	90.2	2.22	56.4	1-5/16"	-	10
	6HBF6	¾" - 14 BSPP	steel	3.55	90.2	2.22	56.4	1-5/16"	-	10
	6HBF6-B	¾" - 14 BSPP	brass	3.55	90.2	2.22	56.4	1-5/16"	-	10
	6HBF6-S	¾" - 14 BSPP	303 stainless	3.55	90.2	2.22	56.4	1-5/16"	-	10
	6HBF6-SS	¾" - 14 BSPP	316 stainless	3.55	90.2	2.22	56.4	1-5/16"	-	10
	6HOF6	1-1/16" - 12 ORB	steel	3.69	93.7	2.22	56.4	1-5/16"	-	10
1"	8HF8	1" - 11-1/2 NPTF	steel	4.13	104.9	2.49	63.2	1-5/8"	-	10
	8HF8-B	1" - 11-1/2 NPTF	brass	4.13	104.9	2.49	63.2	1-5/8"	-	10
	8HF8-S	1" - 11-1/2 NPTF	303 stainless	4.13	104.9	2.49	63.2	1-5/8"	-	10
	8HF8-SS	1" - 11-1/2 NPTF	316 stainless	4.13	104.9	2.49	63.2	1-5/8"	-	10
	8HBF8	1" - 11 BSPP	steel	4.13	104.9	2.49	63.2	1-5/8"	-	10
	8HBF8-B	1" - 11 BSPP	brass	4.13	104.9	2.49	63.2	1-5/8"	-	10
	8HBF8-S	1" - 11 BSPP	303 stainless	4.13	104.9	2.49	63.2	1-5/8"	-	10
	8HBF8-SS	1" - 11 BSPP	316 stainless	4.13	104.9	2.49	63.2	1-5/8"	-	10
	8HOF8	1-5/16" - 12 ORB	steel	4.19	106.3	2.49	63.2	1-5/8"	-	10

H-Series ISO-B Interchange Nipple (Female Threads)

Body Size	Part Detail			Length		Maximum OD		Hex Inch	Package Qty	
	Part Number	Threads	Material	Inch	mm	Inch	mm		Bag	Box
¾"	H6F6	¾" - 14 NPTF	steel	2.44	61.2	1.50	36.6	1-3/8"	-	10
	H6F6-B	¾" - 14 NPTF	brass	2.44	61.2	1.50	36.6	1-3/8"	-	10
	H6F6-S	¾" - 14 NPTF	303 stainless	2.44	61.2	1.50	36.6	1-3/8"	-	10
	H6F6-SS	¾" - 14 NPTF	316 stainless	2.44	61.2	1.50	36.6	1-3/8"	-	10
	H6BF6	¾" - 14 BSPP	steel	2.44	61.2	1.50	36.6	1-3/8"	-	10
	H6BF6-B	¾" - 14 BSPP	brass	2.44	61.2	1.50	36.6	1-3/8"	-	10
	H6BF6-S	¾" - 14 BSPP	303 stainless	2.44	61.2	1.50	36.6	1-3/8"	-	10
	H6BF6-SS	¾" - 14 BSPP	316 stainless	2.44	61.2	1.50	36.6	1-3/8"	-	10
	H6OF6	1-1/16" - 12 ORB	steel	2.58	61.2	1.50	36.6	1-3/8"	-	10
1"	H8F8	1" - 11-1/2 NPTF	steel	2.87	72.9	1.79	45.5	1-5/8"	-	10
	H8F8-B	1" - 11-1/2 NPTF	brass	2.87	72.9	1.79	45.5	1-5/8"	-	10
	H8F8-S	1" - 11-1/2 NPTF	303 stainless	2.87	72.9	1.79	45.5	1-5/8"	-	10
	H8F8-SS	1" - 11-1/2 NPTF	316 stainless	2.87	72.9	1.79	45.5	1-5/8"	-	10
	H8BF8	1" - 11 BSPP	steel	2.87	72.9	1.79	45.5	1-5/8"	-	10
	H8BF8-B	1" - 11 BSPP	brass	2.87	72.9	1.79	45.5	1-5/8"	-	10
	H8BF8-S	1" - 11 BSPP	303 stainless	2.87	72.9	1.79	45.5	1-5/8"	-	10
	H8BF8-SS	1" - 11 BSPP	316 stainless	2.87	72.9	1.79	45.5	1-5/8"	-	10
	H8OF8	1-5/16" - 12 ORB	steel	2.87	72.9	1.79	45.5	1-5/8"	-	10