



The Right Connection®

# HT-Series Correct Connect™

## NEW COLOR BAND DESIGN FOR HT-, HTE-, AND HTZ-SERIES

### Challenges

- Time wasted identifying proper hose routing
- Equipment damage due to incorrect connections
- Product cross-contamination

### Solution

- HT-Series Correct Connect™ color bands:
  - Easily identify seals, materials, or sizes for application
  - Helps with preventative maintenance schedules
  - Reduces setup time for more efficient hose routing

### Applications

- Oilfield equipment, industrial hydraulic equipment, mobile equipment, construction equipment, hydraulic power units, and hydraulic tools

### Sizes

- Body: ¼" to 1"

### Features


- Blue band standard; color bands sold separately (orange, green, yellow, and red)
- No special tools required - field replaceable
- Also available in connect-under-pressure HTE-Series and HTZ-Series

### Materials

- Steel and 316 stainless steel
- Nitrile/polyurethane seals standard; additional seal materials are available
- Polyurethane color bands

### Specifications

- Temperature range: -40°F to 212°F (-40°C to 100°C) with standard seals
- 5000 PSI from ¼" - 1"
- ISO 16028 Interchange
- Interchangeable with Parker FEM, Stucchi FIRG - Series A, Faster FFH, Eaton FF - FD89, Holmbury HQ

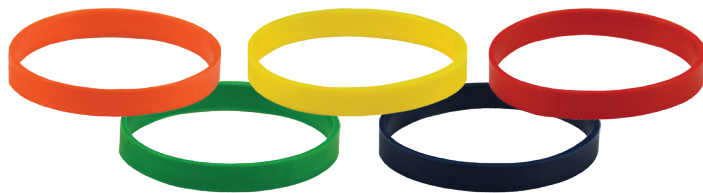

Correct Connect™ part numbers on reverse

## Dixon Group Canada Limited

2200 Logan Avenue  
Winnipeg, MB R2R 0J2  
ph: 877.963.4966  
email: [isales@dixonvalve.ca](mailto:isales@dixonvalve.ca)  
[canada.dixonvalve.com](http://canada.dixonvalve.com)

