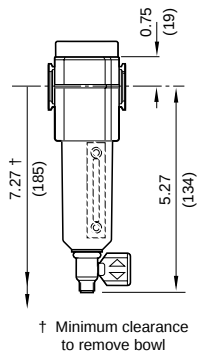
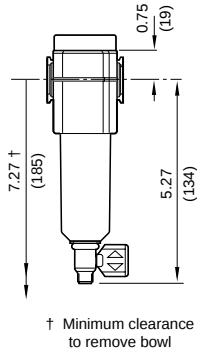


## Series 1 Airline Filters

**Features:**

- 40 micron element
- 2 oz. reservoir
- quick-release bayonet bowl
- prismatic lens liquid level indicator
- particle removal per ISO 8573-1, Class 5 and Class 3
- inlet pressure: transparent bowl: **150 PSI** at ambient temperature 70°F (21°C)  
metal bowl: **250 PSI** at ambient temperature 70°F (21°C)

**Sub-Compact with Transparent Bowl**



| Port Size | SCFM | Semi-Automatic Drain Part # | Manual Drain Part # |
|-----------|------|-----------------------------|---------------------|
| 1/4"      | 55   | <b>F72G-2A</b>              | <b>F72G-2M</b>      |
| 3/8"      | 55   | <b>F72G-3A</b>              | <b>F72G-3M</b>      |

**Sub-Compact with Metal Bowl and Sight Glass**

| Port Size | SCFM | Semi-Automatic Drain Part # | Manual Drain Part # |
|-----------|------|-----------------------------|---------------------|
| 1/4"      | 55   | <b>F72G-2A-MB</b>           | <b>F72G-2M-MB</b>   |
| 3/8"      | 55   | <b>F72G-3A-MB</b>           | <b>F72G-3M-MB</b>   |

**Features:**

- 40 micron element
- 4 oz. reservoir
- quick-release bayonet bowl
- prismatic lens liquid level indicator
- particle removal per ISO 8573-1, Class 5 and Class 3
- inlet pressure: transparent bowl: **150 PSI** at ambient temperature 70°F (21°C)  
metal bowl: **250 PSI** at ambient temperature 70°F (21°C)

**Compact with Transparent Bowl**

| Port Size | SCFM | Automatic Drain Part # | Manual Drain Part # |
|-----------|------|------------------------|---------------------|
| 1/4"      | 53   | <b>F73G-2A</b>         | <b>F73G-2M</b>      |
| 3/8"      | 65   | <b>F73G-3A</b>         | <b>F73G-3M</b>      |
| 1/2"      | 69   | <b>F73G-4A</b>         | <b>F73G-4M</b>      |

**Compact with Metal Bowl and Sight Glass**

| Port Size | SCFM | Automatic Drain Part # | Manual Drain Part # |
|-----------|------|------------------------|---------------------|
| 1/4"      | 53   | <b>F73G-2A-MB</b>      | <b>F73G-2M-MB</b>   |
| 3/8"      | 65   | <b>F73G-3A-MB</b>      | <b>F73G-3M-MB</b>   |
| 1/2"      | 69   | <b>F73G-4A-MB</b>      | <b>F73G-4M-MB</b>   |



See pages 236-239 for filter accessories.



FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 90 PSIG inlet pressure.