


Wilkinson Miniature Filter / Regulators



metal bowl

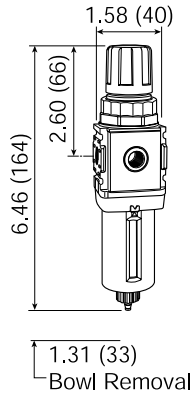

Features:

- 0-125 PSI adjusting range
- 5 micron element
- .4 oz. bowl
- self-relieving
- supplied with a 0-160 PSI flush mount style gauge
- maximum operating conditions:
transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
metal bowl: **250 PSIG** (17.2 bar) and **32°F to 150°F** (0°C to 65.5°C)

E


Size	SCFM	With Transparent Bowl and Guard		With Metal Bowl	
		Automatic Drain Part #	Manual Drain Part #	Automatic Drain Part #	Manual Drain Part #
1/8"	28.6	B08-01AG	B08-01MG	B08-01AGMB	B08-01MGMB
1/4"	42.1	B08-02AG	B08-02MG	B08-02AGMB	B08-02MGMB

See pages 244-245 for filter/regulator accessories.

Wilkinson Miniature Lubricators



transparent bowl



Features:


- 1 oz. bowl
- adjustable oil feed
- full view sight dome
- **Do not fill under pressure. Air supply must be turned off and pressure bled from unit prior to adding oil.**
- maximum operating conditions:
transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
metal bowl: **250 PSIG** (17.2 bar) and **32°F to 175°F** (0°C to 80°C)



Size	SCFM	With Transparent Bowl Part #	With Metal Bowl Part #
1/8"	20	L03-01A	L03-01AMB
1/4"	20	L03-02A	L03-02AMB



metal bowl



Features:

- .6 oz. bowl
- adjustable oil feed
- full view sight dome
- fill under pressure design
- maximum operating conditions:
transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
metal bowl: **250 PSIG** (17.2 bar) and **32°F to 150°F** (0°C to 65.5°C)

Size	SCFM	With Transparent Bowl Part #	With Metal Bowl Part #
1/8"	23.5	L08-01A	L08-01AMB
1/4"	57.5	L08-02A	L08-02AMB

See pages 242-244 for lubricator accessories. See page 160 for air tool lubricant.



FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.