


## Wilkerson Miniature Regulators

### Features:

- 0-125 PSI adjusting range
- balanced valve design
- self-relieving standard
- non-rising push/pull locking adjustment knob
- two 1/8" NPT gauge ports standard on models without gauge, one 1/8" NPT gauge port standard on models with gauge - can be used for additional outlet ports.
- models with gauge are supplied with a 0-160 flush mount style gauge
- models supplied without gauge use a GC620 gauge.
- panel mount nuts sold separately
- maximum operating conditions:  
**300 PSIG** (20.7 bar) and **32°F to 150°F** (0°C to 65.5°C)




Size	SCFM	With Gauge Part #	Without Gauge Part #
1/8"	29.2	<b>R08-01RG</b>	<b>R08-01R</b>
1/4"	44	<b>R08-02RG</b>	<b>R08-02R</b>

## Wilkerson Miniature Water Regulators

### Features:

- 2-125 PSI adjusting range
- suitable for water and compressed air service
- brass construction - wetted parts
- non-relieving spring-loaded diaphragm
- panel mount nut included
- two 1/8" NPT gauge ports standard
- models supplied without gauge use a GC620 gauge
- maximum operating conditions:  
**300 PSIG** (20.7 bar) and **40°F to 125°F** (4.4°C to 52°C)




Size	SCFM	With Gauge Part #	Without Gauge Part #
1/8"	11	<b>RB3-01RG</b>	<b>RB3-01R</b>
1/4"	14	<b>RB3-02RG</b>	<b>RB3-02R</b>

See pages 216-217 for regulator accessories.

## Wilkerson Miniature Filter / Regulators

### Features:

- 2-125 PSI adjusting range
- 5 micron element
- .5 oz. bowl
- self-relieving
- supplied with a GC620 gauge
- maximum operating conditions:  
transparent bowl: **125 PSIG** (8.6 bar) and **40°F to 125°F** (4.4°C to 52°C)  
metal bowl: **300 PSIG** (20.7 bar) and **40°F to 125°F** (4.4°C to 52°C)

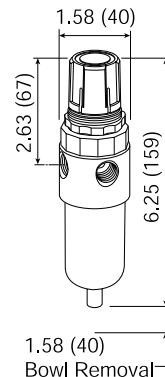

transparent bowl

Size	SCFM	With Transparent Bowl and Guard		With Metal Bowl	
		Automatic Drain Part #	Manual Drain Part #	Automatic Drain Part #	Manual Drain Part #
1/8"	13	<b>BB3-01AG</b>	<b>BB3-01MG</b>	<b>BB3-01AGMB</b>	<b>BB3-01MGMB</b>
1/4"	16	<b>BB3-02AG</b>	<b>BB3-02MG</b>	<b>BB3-02AGMB</b>	<b>BB3-02MGMB</b>



FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.