


3 Piece Industrial Stainless Steel Ball Valves

Features:

- full port stainless steel ball valves with FNPT ends or socket weld
- blow out proof stem
- live-loaded stem packing
- 316 stainless steel stem
- swing out design for easy maintenance
- ISO 5211 mounting pad
- CF8M stainless steel body and ball
- private label handle covers available, page 652
- maximum pressure: ½" - 2" **1,000 PSI WOG** at 65°F (18°C)
2½" - 3" **800 PSI WOG** at 65°F (18°C)
4" **600 PSI WOG** at 65°F (18°C)
- maximum temperature: **400°F (204°C)**

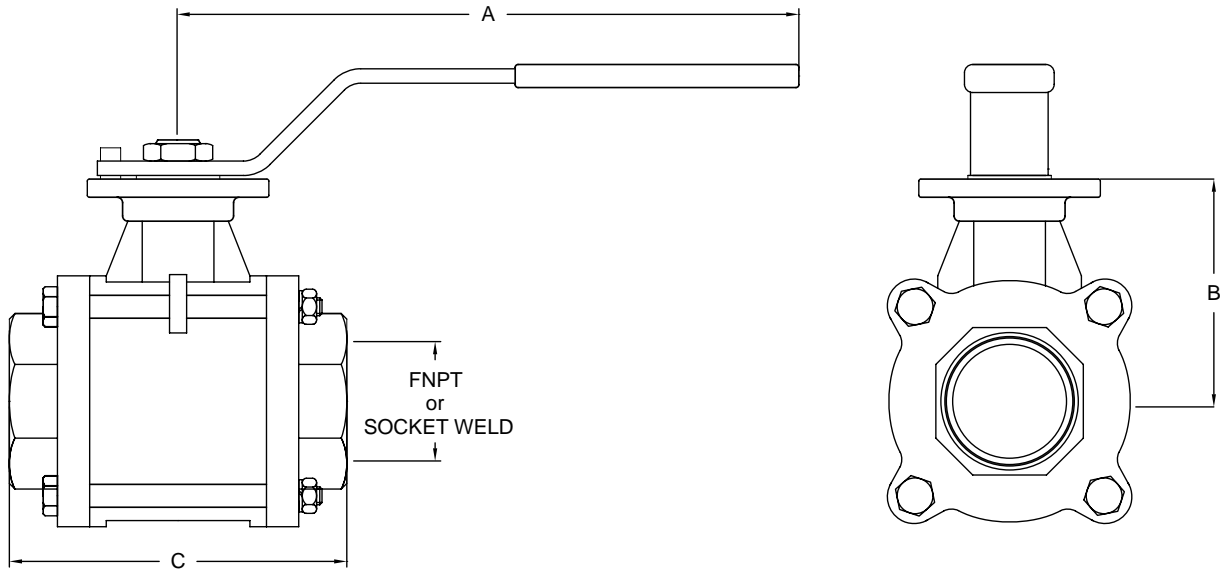

Size	A	B	C	FNPT	Socket Weld	FNPT Part Number	Socket Weld Part Number
1/4"	4.72	1.52	2.51	0.25	n/a	BV2I*-02511-A	BV2I*-02533-A
3/8"	4.72	1.52	2.51	0.38	0.71	BV2I*-03811-A	BV2I*-03833-A
1/2"	4.72	1.67	2.84	0.50	0.88	BV2I*-05011-A	BV2I*-05033-A
3/4"	4.72	1.91	3.11	0.75	1.09	BV2I*-07511-A	BV2I*-07533-A
1"	5.35	2.17	3.29	1.00	1.35	BV2I*-10011-A	BV2I*-10033-A
1-1/4"	5.35	2.35	4.14	1.25	1.70	BV2I*-12511-A	BV2I*-12533-A
1-1/2"	9.17	2.77	4.41	1.50	1.94	BV2I*-15011-A	BV2I*-15033-A
2"	9.17	3.38	5.13	2.00	2.44	BV2I*-20011-A	BV2I*-20033-A
2-1/2"	17.32	4.29	6.64	2.50	3.01	BV2I*-25011-A	BV2I*-25033-A
3"	17.32	4.67	7.34	3.00	3.52	BV2I*-30011-A	BV2I*-30033-A
4"	17.32	4.54	8.88	4.00	4.52	BV2I*-40011-A	BV2I*-40033-A

* Use G or C; G = RTFE, C = 25% Carbon PTFE

All dimensions are in inches unless otherwise noted. Engineering dimensions are available upon request. Specifications are subject to change without notice.