

Spring Check Type Snoots - Pin Lug

25-288 / 25-289

Features:

- finish: -P polished, -C polished chrome plated
- Other configurations are also available. Consult Dixon for pricing and availability.
- for use up to **175 PSI** at 70°F (21°C)

female outlet


25-288

- female NPT rigid with hexagon by 2½" female hose thread to swivel
- connections are attached to the 25-416 or 25-417 bodies with pipe nipples (not included)

| Outlet Female NPT | Inlet Female NH (NST) | Cast Brass Part # | Powhatan Part # | Wt. Lbs. |
|-------------------|-----------------------|----------------------|-----------------|----------|
| 3" | 2½" | CSSTF25F30T-P | 25-288-00002 | 14.5 |
| 3" | 2½" | CSSTF25F30T-C | 25-288-00003 | 14.5 |
| 3" | 3" | CSSTF30F30T-P | 25-288-00007 | 12 |



Dimensions

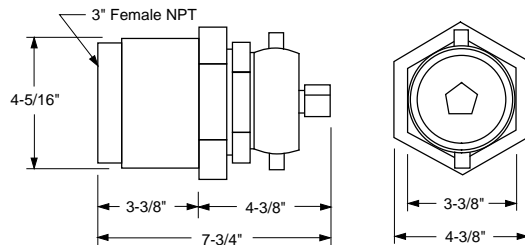

male outlet

25-289


Features:

- male NPT x 2½" female hose thread to swivel
- used when a direct connection to 25-416 or 25-417 bodies is desired

| Outlet Male NPT | Inlet Female NH (NST) | Cast Brass Part # | Powhatan Part # | Wt. Lbs. |
|-----------------|-----------------------|----------------------|-----------------|----------|
| 3" | 2½" | CSSTM25F30T-P | 25-289-00001 | 10 |
| 3" | 2½" | CSSTM25F30T-C | 25-289-00002 | 10 |



Dimensions

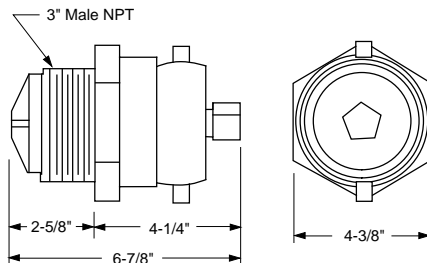

Under no circumstances should a 25-289 check snoot be installed directly into a pipe, as this may prevent the snoot from opening. Install directly into the appropriate standpipe body only.