

316 Stainless Steel 3-Piece Ball Valves

Full Port



Features:

- FNPT ends or socket weld
- blow out proof stem
- live-loaded stem packing
- swing out design for easy maintenance
- ISO 5211 mounting pad
- RTFE seat and seals
- maximum temperature: **400°F (204°C)**


Size	Port Type	PSI @ 65°F (18°C)	Body Length	Female NPT 316 Stainless Steel Part #	Socket Weld 316 Stainless Steel Part #
½"	full	1000	2.5"	BV2IG-05011-A	BV2IG-05033-A
¾"	full	1000	3.1"	BV2IG-07511-A	BV2IG-07533-A
1"	full	1000	3.3"	BV2IG-10011-A	BV2IG-10033-A
1¼"	full	1000	4.1"	BV2IG-12511-A	BV2IG-12533-A
1½"	full	1000	4.4"	BV2IG-15011-A	BV2IG-15033-A
2"	full	1000	5.1"	BV2IG-20011-A	BV2IG-20033-A
2½"	full	800	6.6"	BV2IG-25011-A	BV2IG-25033-A
3"	full	800	7.3"	BV2IG-30011-A	BV2IG-30033-A
4"	full	600	8.9"	BV2IG-40011-A	BV2IG-40033-A

316 Stainless Steel 2-Piece Domestic Ball Valves

Full Port

Features:

- rated to **1,000 PSI** Cold Working Pressure
- rated to **150 PSI** saturated steam
- vacuum service to 29 inches Hg
- 316 stainless body, ball and stem
- PTFE seals
- blow-out proof stem
- vinyl handle cover
- full port
- temperature range: **-40°F to 400°F (-40°C to 204°C)**

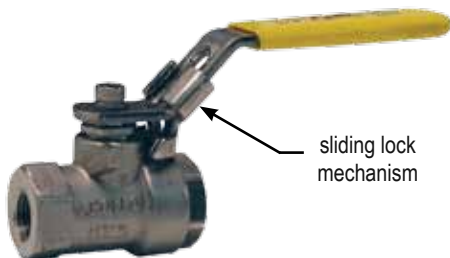

sliding lock mechanism

female NPT x female NPT

Size	Port Type	316 Stainless Steel Part #
1/4"	full	DSBV25
3/8"	full	DSBV38
1/2"	full	DSBV50
3/4"	full	DSBV75
1"	full	DSBV100
1¼"	full	DSBV125
1½"	full	DSBV150
2"	full	DSBV200