

3-Way Brass Diverting Ball Valves - T Flow

Female NPT x Female NPT x Female NPT

Features

- Blow-out proof stem
- Adjustable stem packing

Materials


- Chrome plated brass ball
- PTFE seats, seals, and thrust washer

Specifications

- Maximum temperature: **366°F (186°C)**
- Pressure rating: **400 PSI WOG;**
100 PSI saturated steam

Size	Port	Brass Part #
1/2"	standard	BBV50DTW
3/4"		BBV75DTW
1"		BBV100DTW
1-1/4"		BBV125DTW
1-1/2"		BBV150DTW
2"		BBV200DTW

NOTE: 1/4 turn handle can be adjusted to any orientation.
Notches on the valve stem reflect the three openings on the ball.

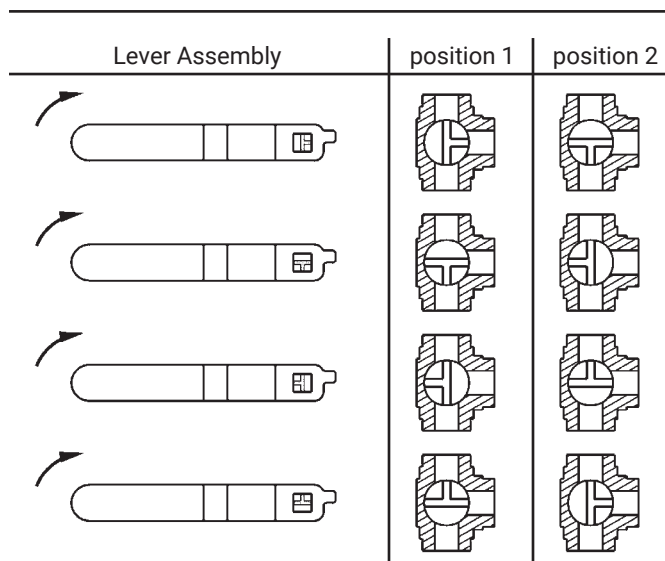

3-Way Brass Diverting Ball Valves - L Flow

Female NPT x Female NPT x Female NPT

Features

- Can be used with gasoline and diesel fuel
- Blow-out proof stem
- Adjustable packing gland

Materials

- Chromium-plated ball
- RPTFE seats and stuffing box ring
- Stainless steel handle and nut with vinyl sleeve

Specification

- Pressure rating: **400 PSI CWP**

Size	Port	Bronze Part #
1/2"	full	BBV50TW ¹
3/4"	standard	BBV75TW
1"		BBV100TW

¹ Carbon steel handle and nut with vinyl sleeve

Features

- Blow-out proof stem
- Adjustable packing gland

Materials

- Stainless steel ball
- RPTFE seats and stuffing box ring
- Stainless steel handle and nut with vinyl sleeve

Specification

- Rated to **800 PSI CWP**

Approval

- Meets NACE MR0175

Size	Port	Stainless Steel Part #
1/2"	full	SSBV50TW
3/4"	standard	SSBV75TW
1"		SSBV100TW

