Bayloc® Dry Disconnects


Adapter x Female NPT

Applications

- Compatible with most cam and groove style dry disconnects
- Helps prevent spillage from normal or accidental disconnects
- · For use in transfer of hazardous fluids

Features


- Two-piece adapter design for easy rebuilding of adapters
- Fully interchangeable with Kamvalok (OPW trademark) style fittings
- For pressure ratings at other temperatures, contact Dixon®
- Contact Dixon® at 877.963.4966 for chemical compatibility, size, material selection, and special configurations
- Spring loaded sealing device snaps closed should valve become disconnected with the poppet open

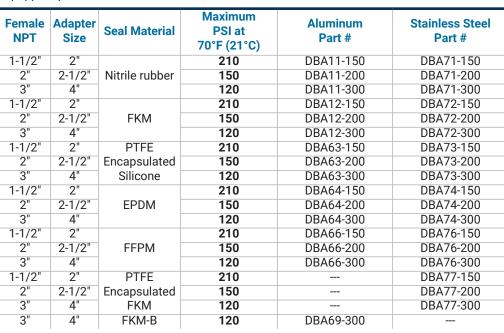







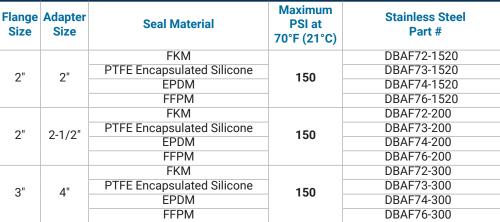



For flange dimensions, diagrams, and additional information please reference canada. dixonvalve.com. BSP Threads are available contact Dixon® for quote.



Adapter x 1-1/2" and 2" Female NPT



Adapter x 3" Female NPT

