



Global Cast Angle Valves

Female Inlet

Features:

- NPT inlet thread only
- aluminum handwheel
- working pressure: **300 PSI** at 70°F (21°C)
- New York City Board of Standards and Appeals, approval # MEA 54-07-E

available finish:

- cast (standard)
- polished: -P
- chrome: -C
- minimum quantity for special thread consult Dixon



Inlet Female NPT	Outlet	Yellow DZR Brass Part #	Wt. Lbs.
1 1/2"	1 1/2" Male NH (NST)	AV150-I	4.10
2 1/2"	2 1/2" Male NH (NST)	AV250-I	9.00
2 1/2"	2 1/2" CSA	AV250C-I	9.00
2 1/2"	2 1/2" WCT	AV250W-I	9.00
2 1/2"	2 1/2" BAT	AV250B-I	9.00
2 1/2"	2 1/2" QST	AV250Q-I	9.00

Grooved Inlet



Inlet Grooved	Outlet Male NH (NST)	Part #	Wt. Lbs.
2 1/2"	2 1/2"	AVG250F-I	9.5

Inlet Grooved	Outlet Female NPT	Part #	Wt. Lbs.
2 1/2"	2 1/2"	AVGF250-I	9.5

Double Female

Features:

- NPT inlet and outlet only
- aluminum handwheel
- working pressure: **300 PSI** at 70°F (21°C)
- New York City Board of Standards and Appeals, approval # MEA 54-07-E


available finish:

- cast (standard)
- polished = -P
- chrome = -C



Inlet Female NPT	Outlet Female NPT	Yellow DZR Brass Part #	Wt. Lbs.
1 1/2"	1 1/2"	AVF150-I	3.66
2 1/2"	2 1/2"	AVF250-I	9.80

Dimensions

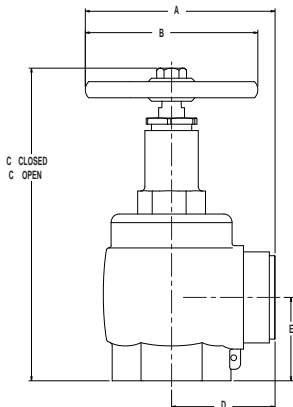

Size	A	B	C (closed)	C (open)	D	E	Wt. in Lbs.
1 1/2"	4.13"	3.75"	6.80"	7.78"	2.25"	1.81"	4.4
2 1/2"	5.69"	5.00"	9.00"	10.72"	3.19"	2.59"	9.5