


API Gravity Drop Adapters Two Piece Body

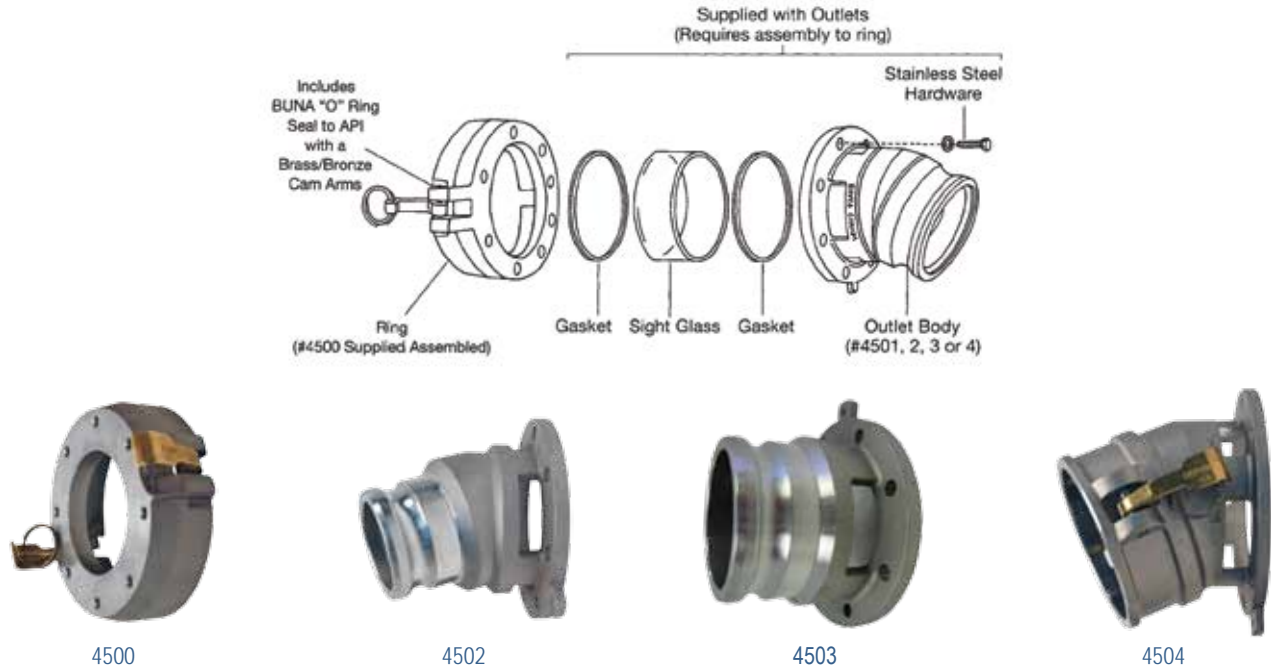

Two piece gravity drop adapter systems consist of a) 4500 API valve connection ring x 4" TTMA flange, and b) Outlet adapter/coupler with sight glass x 4" TTMA flange. The flanged surfaces are then bolted together. 4501, 4502, 4503 and 4504 come with flange bolts, sight glass and seals.

Part #	Description	Fuel Compatibility
4500	API valve connection ring x 4" TTMA flange, Baylast™ O-ring seal	Gasoline and diesel, up to E100 and B100 biofuels
4501	3" cam & groove adapter outlet 22½° x 4" TTMA flange, sight glass and Baylast™ seals	Gasoline and diesel, up to E100 and B100 biofuels
4502	4" cam & groove adapter outlet 22½° x 4" TTMA flange, sight glass and Baylast™ seals	Gasoline and diesel, up to E100 and B100 biofuels
4503	3" cam & groove adapter outlet straight x 4" TTMA flange, sight glass and Baylast™ seals	Gasoline and diesel, up to E100 and B100 biofuels
400-ALT-AL	4" cam & groove adapter outlet straight x 4" TTMA flange- NO sight glass - requires 40322TF gasket & flange bolts	Gasoline and diesel, up to E100 and B100 biofuels
400-DLT-AL	4" cam & groove adapter outlet straight x 4" TTMA flange- NO sight glass - requires 40322TF gasket & flange bolts	Gasoline and diesel, up to E100 and B100 biofuels
4504	4" cam & groove adapter outlet 22½° x 4" TTMA flange, sight glass and Baylast™ seals	Gasoline and diesel, up to E100 and B100 biofuels

- Viton® seal available
- See page 949 for TTMA flange gaskets.
- See page 1061 for repair kits and replacement parts.

Product instruction sheets and technical data can be viewed on our website at dixongroupcanada.com by selecting the 'Resources' menu.



Biofuel Compatible, see fuel compatibility chart on page 956 for more information.