DATA SHEET

LFAB PVC Blue Layflat Medium Duty

The Right Connection®

Designed for medium-duty applications for the transfer of water and other non-corrosive liquids on building sites, in mining applications and for general civil, construction, irrigation and drainage operations.

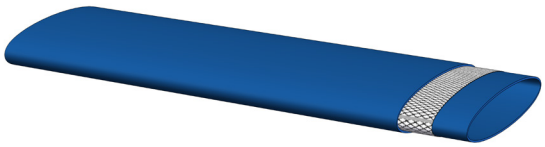

Hose Construction

Tube: PVC - blue
Cover: PVC - blue
Reinforcing: Polyester yarn

Features

- Abrasion resistant
- Ozone resistant
- Weather resistant
- Extruded

Temperature

- -10°C to 60°C

Standards

- Nil

Part Number

- To view available part number options please click here

Dimensions (mm)		Pressures				Vacuum (bar)	Weight (kg/mtr)	Bend Radius (mm)	Coil Lengths (mtr)
		Working		Burst					
ID	OD	PSI	Bar	PSI	Bar				
25.4	28.6	102	7	319	22	n/a	0.16	n/a	100
31.8	35.0	94	7	290	20	n/a	0.18	n/a	100
38.1	41.3	80	6	247	17	n/a	0.20	n/a	100
50.8	54.0	73	5	203	16	n/a	0.28	n/a	100
63.5	66.7	73	5	203	16	n/a	0.36	n/a	100
76.2	79.4	58	4	189	13	n/a	0.42	n/a	100
101.6	104.8	58	4	189	13	n/a	0.61	n/a	100
127.0	130.2	36	3	116	8	n/a	0.96	n/a	100
152.4	156.8	36	3	116	8	n/a	1.20	n/a	100
203.2	207.6	29	2	87	6	n/a	1.85	n/a	100

Product Code: DA33